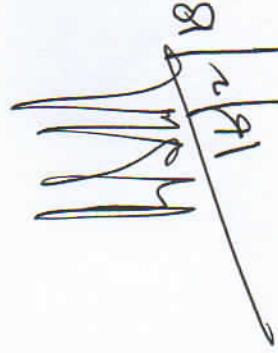


Bill of Quantities (BoQ)/ Schedule (8)
Promoting Usage of Jute Geotechnical Textiles in NER for the State of Manipur under PMGSY works

Earnest Money Deposit (EMD) : 2% of Estimated cost put to tender.

Time Allowed = 1 (one) month

Sl No.	Name of Project	Item of works	Qty.	Unit	Quoted Rate (Rs)		Quoted Amount (Rs.)
					In figure	In words	
1.	Slope Stabilization and protection of soil erosion using jute Geotextile on the road IT Road (Genel) to Kuilong III Pt. I, in Tamenglong District 10 Km (25.00Km to 35.00Km) PACKAGE NO. MN0769.	Cost of 500 GSM open weave JGT and installation work over prepared slope, preferably at an angle of internal friction, with proper overlap and anchoring for a stretch of 2400 meter length and 10 meter slope height	24,800.00	Sqm.			


 16/2/18